

Accura[®] Xtreme[™]

Ultra-tough grey plastic with outstanding durability, accuracy and aesthetics to replace CNC-machined polypropylene and ABS articles.

Tough/Durable Class

Stereolithography (SLA)

GET EXTREME PERFORMANCE AND DURABILITY

Fast and easy to process, the Accura Xtreme material offers physical properties that are close enough to durable end-use plastics like ABS and Polypropylene to make it ideal for functioning prototypes in demanding applications, as well as for short-run production projects.

Accura Xtreme is a grey plastic with the appearance of a final production part with outstanding durability, impact resistance, accuracy and a thermal resistance over 60 °C.

Liquid Material

MEASUREMENT	CONDITION	VALUE
Viscosity	@ 30 °C (86 °F)	225 cps
Penetration Depth (Dp)		4.1 mils
Critical Exposure (Ec)		11.7 mJ/cm ²
Color		Grey
Liquid Density	@ 25 °C (77 °F)	1.13 g/cm ³ 0.04 lbs/in ³

Printer Compatibility/Packaging:

ProJet [®] 6000/7000 SLA printers:	2L cartridge
ProX [®] 800/950, iPro [™] 8000/9000 SLA printers:	10 kg cartridge
Viper si2 [™] , SLA 5000 and SLA 7000 printers:	10 kg standard bottle

APPLICATIONS


- Form, fit and function prototypes
- Durable and challenging assemblies
 - Snap fit assemblies
 - Tough enclosures
 - Consumer electronic components
- General purpose prototyping
- Master patterns for RTV/silicone molding
- Replace CNC machining of Polypropylene and ABS

BENEFITS

- Robust parts resisting breakage
- Handles challenging functional assemblies
- Withstands modest temperatures without distortion
- Increased application opportunities
- Aesthetics of molded parts
- Ease-of-use and fast processing

FEATURES

- Outstanding durability and impact resistance
- Look and feel of a durable molded plastic
- Excellent accuracy
- Good moisture and thermal resistance
- Low viscosity formulation

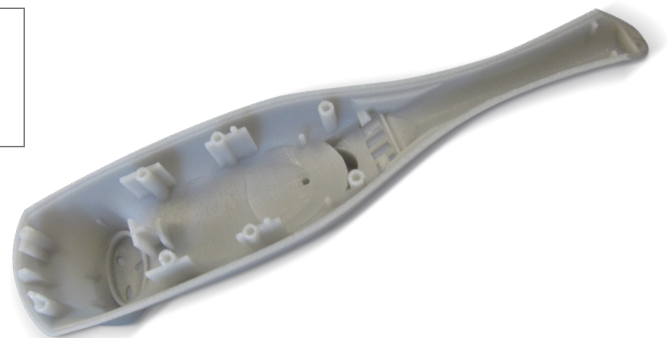



Accura[®] Xtreme[™]


Tough/Durable Class
Stereolithography (SLA)

Ultra-tough grey plastic with outstanding durability, accuracy and aesthetics to replace CNC-machined polypropylene and ABS articles.

Post-Cured Material

MECHANICAL PROPERTIES		LARGE FRAME SLA PRINTERS		PROJET SLA PRINTERS ¹	
MEASUREMENT	CONDITION	METRIC	U.S.	METRIC	U.S.
Tensile Strength (MPa PSI)	ASTM D 638	38-44	5510-6380	41	5950
Tensile Modulus (MPa KSI)	ASTM D 638	1790-1980	260-287	1890	274
Elongation at Break	ASTM D 638	14-22 %		18 %	
Flexural Strength (MPa PSI)	ASTM D 790	52-71	7540-10300	62	8990
Flexural Modulus (MPa KSI)	ASTM D 790	1520-2070	220-300	1850	268
Impact Strength (J/m Ft-lbs/in)	ASTM D 256	35-52	0.7-1.0	44	0.8
Heat Deflection Temperature @ 0.45 MPa (66 PSI) @ 1.82 MPa (264 PSI)	ASTM D 648	62 °C	144 °F	62 °C	144 °F
		54 °C	129 °F	54 °C	129 °F
Glass Transition (Tg)	DMA, E''	70-74 °C	158-165 °F	52 °C	126 °F
Hardness, Shore D		86		86	
Solid Density (g/cm ³ lbs/in ³)	@ 25 °C (77 °F)	1.19	0.043	1.19	0.043

¹ Accura Xtreme was also previously marketed under the Visijet[®] SL Tough name for the ProJet 6000 and 7000 printers

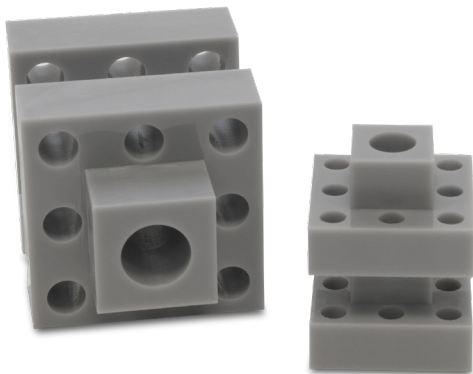

www.3dsystems.com

Warranty/Disclaimer: The performance characteristics of these products may vary according to product application, operating conditions, or with end use. 3D Systems makes no warranties of any type, express or implied, including, but not limited to, the warranties of merchantability or fitness for a particular use.

© 2020 by 3D Systems, Inc. All rights reserved. Specifications subject to change without notice. 3D Systems, the 3D Systems logo, ProX, Accura, ProJet and Visijet are registered trademarks of 3D Systems, Inc.